



DIRECT MOUNT 6 DBI HORIZONTALLY POLARIZED OMNI

Laird Technologies' OC24006H is a 2400- 2500 MHz omnidirectional, collinear, horizontally polarized array especially designed to complement interior or exterior mounted wireless network systems. An integrated RF connector is imbedded in the antenna base cap for direct AP mounting. Special venting permits either upright or inverted orientation in outdoor locations. The antenna may also be pole mounted when separation from the AP is required for optimum positioning.

FEATURES

- Horizontally polarized omnidirectional
- Indoor/outdoor usage
- Rugged, lightweight and water resistant
- Direct to radio mounting
- Conformance to RoHS

MARKETS


- Offices, hotels and college campuses
- Airports and hospitals
- Bus terminals and train stations
- Museums, libraries and retail malls
- Wi-Fi Hot Spots
- Cellular off-loading

Parameter	Performance
Frequency	2400-2500 MHz
Gain (dBi)	6 dBi
VSWR	2.0:1
Nominal Impedance	50Ω
Polarization	Linear, Horizontal
Azimuth Typical 3dB Beamwidth	Omnidirectional
Elevation Typical 3dB Beamwidth	25°
Input Power	10W
RF Connector	Model Specific
Radome Material	Polycarbonate, UV White
Mounting	Connector Fixed or Mast Mount Kit (Upright/Inverted Orientations)
Operational Temperature	-30°C to +70°C
Storage Temperature	-40°C to +85°C
Dimensions (height x OD)	329 x 45 mm
Weight	0.26 kg


CONNECTORS

Part No.	Connector
OC24006H-FNF	Type N female
OC24006H-FNM	Type N male

ANTENNA PATTERNS

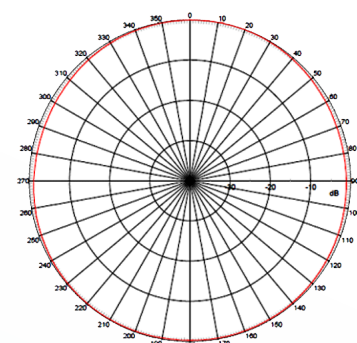

H-plane 2.45 GHz

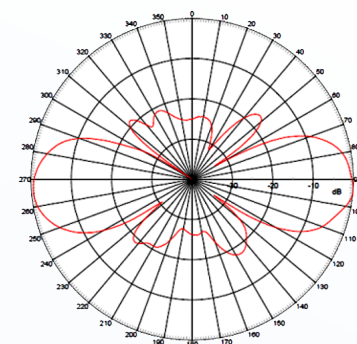

E-plane 2.45 GHz

global solutions: local support™

Americas: +1.847.839.6907
 IAS-AmericasEastSales@lairdtech.com
 Europe: +44.(0).1628.858941
 IAS-EUSales@lairdtech.com
 Asia: +86.21.5855.0827.127
 IAS-AsiaSales@lairdtech.com
www.lairdtech.com

ANT-DS-OC24006H 1212

Any information furnished by Laird Technologies, Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Technologies materials rests with the end user. Laird Technologies makes no warranties as to the fitness, merchantability, suitability or non-infringement of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies' Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2012 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies Logo, and other marks are trade marks or registered trade marks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird Technologies or any third party intellectual property rights.